


900 (35")

900 (35")



650 (25.5")

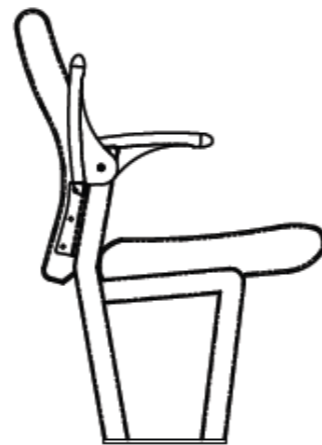

Product Specifications

Structure

- Mild steel rectangular hollow section of 60mm X 40mm X 3mm thk.
- Mild steel foot plate of 6mm.
- Precision hexagon bolts, screws and nuts in zinc plated.

Backrest and Seat

- The seat component have ergonomically designed with cold moulded polyurethane foam with thickness of 90-100mm.
- The back component is ergonomically designed cold moulded polyurethane foam with thickness of 80-90mm and moulded metal frame.
- The back cushion is fully upholstered in fabric or vinyl.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use and hot-dipped galvanized according to TS EN ISO 1461 for outdoor use.
- All metal parts are tested according to EN ISO 9227, Neutral Salt Spray Test, more than 1000h.
- Conformity with BS-6496 hardness test.

Fire Resistance

- Flame retardant compliance with local regulations or international standards such as EN 1021 or BS 5852 Source 0,1, and 5.